

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 13587 (1992): Computer system configuration diagram symbols and conventions for information processing systems [LITD 14: Software and System Engineering]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



IS 13587 : 1992

ISO 8790 : 1987

(Reaffirmed 2004)

भारतीय मानक

सूचना प्रक्रमण तंत्रों के लिए कम्प्यूटर तंत्र विन्यास
आरेख प्रतीक तथा परिपाटियां

Indian Standard

COMPUTER SYSTEM CONFIGURATION DIAGRAM
SYMBOLS AND CONVENTIONS FOR INFORMATION
PROCESSING SYSTEMS

UDC 681'3'04

© BIS 1992

BUREAU OF INDIAN STANDARDS

MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

November 1992

Price Group 7

NATIONAL FOREWORD

This Indian Standard which is identical with ISO 8790 : 1987 'Information processing systems — Computer system configuration diagram symbols and conventions' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendation of the Information Systems and Software Sectional Committee (LTD 33) and approval of the Electronics and Telecommunication Division Council.

In the adopted standard certain terminology and conventions are however not identical to those used in Indian Standards. Attention is particularly drawn to the following:

Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.

Indian Standard

COMPUTER SYSTEM CONFIGURATION DIAGRAM. SYMBOLS AND CONVENTIONS FOR INFORMATION PROCESSING SYSTEMS

1 Scope

This International Standard establishes graphical symbols and their conventions for use in configuration diagrams for computer systems, including automatic data processing systems.

2 Field of application

The graphical symbols included in this International Standard are intended to represent major hardware units of a computer system configuration. This International Standard does not cover:

- detailed representation of hardware, such as logical or electronic circuit diagrams;
- or pictorial type diagrams that utilize pictures or drawings to depict a system;
- nor does it include any abbreviations or mnemonics used to identify a specific kind of unit.

The configuration diagram is used to represent the physical structure of computer systems such as the physical equipment and the connection cables.

A configuration diagram can represent

- the maximum configuration in which all hardware units are included;
- the configuration resulting from reallocation of hardware units and temporary withdrawal of service;
- the minimum configuration necessary for the solution of a given problem;
- alternative configurations of the same equipment, etc.

The configuration diagram has many uses, namely:

- in commercial brochures of computer manufacturers;
- in selection and evaluation of computer configurations;
- in the technical clauses of computer contracts for purchase or lease;
- in the representation of a computer centre;
- in magazine articles describing data processing applications;
- in specifications of data processing applications;
- in education.

A configuration diagram consists of

- a) hardware symbols where each symbol represents a physical unit by its essential function;
- b) connection lines representing a local or distant (transmission line) physical connection;
- c) special conventions to facilitate the reading and the writing of the diagram.

3 Configuration diagram symbols


This clause defines the symbols for describing physical units and the means used to connect them. Additional methods used to facilitate the reading and writing of the diagram are defined in clause 4.

Four levels of symbols are presented to permit various levels of detail to be shown in the diagram. The highest level represents only physical units and their connections. The second level represents the principal functional units of computer systems, such as processors, storage, input-output units, communications units, and means of connection. The third level represents the basic types of media or means of input-output used for storage and input-output. The lowest level provides the most detailed distinction between the various kinds of units. (See consolidated table of symbols in clause 5.)

The same symbol is used at several different levels where there is no necessity for further details. Identification in such cases is supplied by the use of symbol identification (see 4.3).


3.1 Physical unit or its enclosure

These symbols are basic symbols representing any kind of physical unit or set of physical units. These symbols also represent an enclosure of a unit or set of units (see 4.4).

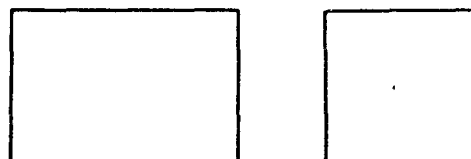


3.1.1 Processing or control unit

These symbols represent any kind of processing or control unit, for example, central processing unit, auxiliary processing unit, arithmetic unit, main storage control unit, auxiliary storage control unit, input-output control unit, communication control unit, configuration control unit, channel unit, communication node, modem, multi-component terminals, multi-component consoles.

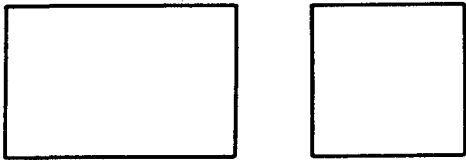


3.1.1.1 Processing or control unit

This symbol represents a processing or a control unit.




3.1.1.2 Selection unit

This symbol represents a selection unit.




3.1.1.3 Conversion unit

This symbol is a generic symbol representing any kind of conversion unit; for example, sensor, modulator, decoder, concentrator.




3.1.2 Storage unit

This symbol is a generic symbol representing any kind of storage unit.




3.1.2.1 Main storage unit

This symbol represents a main storage unit.




The basic symbols for a physical unit may be used if a suitable identifier is supplied; this is only used in depicting a composite item, as illustrated in 4.4c).

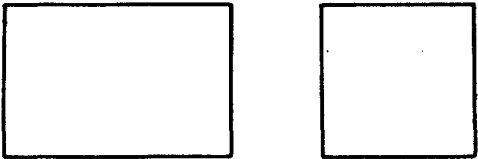


3.1.2.2 Sequential access storage unit

This symbol is a generic symbol representing any kind of sequential access storage unit which is only sequentially accessible; for example, magnetic tape unit, cartridge tape unit, cassette tape unit.



3.1.2.2.1 Magnetic tape unit

This symbol represents a magnetic tape unit.



3.1.2.2.2 Cartridge or cassette unit

This symbol represents a cartridge or cassette unit.




3.1.2.3 Direct access storage unit

This symbol is a generic symbol representing any kind of direct access storage unit; for example, magnetic disk pack unit, fixed disk unit, disk cartridge unit, drum unit, flexible disk unit.




3.1.2.3.1 Magnetic disk or drum unit

This symbol represents a magnetic disk or drum unit; for example, disk pack unit, fixed disk unit, disk cartridge unit, drum unit.




3.1.2.3.2 Flexible disk unit

This symbol represents a flexible disk unit.




3.1.2.3.3 Solid-state or magnetic core peripheral unit

This symbol is a generic symbol representing any kind of solid-state or magnetic core peripheral storage unit; for example, CCD, magnetic core, or magnetic bubble peripheral storage unit.




3.1.2.4 Mass storage unit

This symbol is a generic symbol representing any kind of mass storage unit; for example, tape-cartridge-based mass storage unit, optical disk storage unit, video disk storage unit, laser beam storage unit, electron beam storage unit.




3.1.2.4.1 Mass storage unit

This symbol represents a mass storage unit.



3.1.2.4.2 Tape-cartridge-based mass storage unit

This symbol represents a tape-cartridge-based mass storage unit.




3.1.3 Input-output unit

This symbol is a generic symbol representing any kind of input-output unit.



3.1.3.1 Input-output unit for human-readable document

This symbol is a generic symbol representing any kind of input-output unit for human-readable documents; for example, printer, OCR, MICR, microfilm, tally roll, X-Y plotter, facsimile, scanner.



3.1.3.1.1 Printer

This symbol represents a printer.




3.1.3.1.2 X-Y plotter

This symbol represents an X-Y plotter.




3.1.3.2 Manual input unit

This symbol is a generic symbol representing any kind of input unit where the information is entered manually at the time of processing; for example, online keyboard, switch, push button, light pen, bar-code wand, mouse, digitizer.



3.1.3.2.1 Online keyboard

This symbol represents an online keyboard.




3.1.3.3 Card unit

This symbol is a generic symbol representing any kind of card unit; for example, punched-card unit, magnetic card unit, mark-sense card unit, stub card unit, mark-scan card unit.



3.1.3.3.1 Punched card unit

This symbol represents a punched card unit.




3.1.3.4 Punched tape unit

This symbol represents any kind of punched tape unit.




3.1.3.5 Display unit

This symbol is a generic symbol representing any kind of visual display unit for human use; for example, cathode-ray tube display unit, liquid quartz display unit, plasma display unit, display board, online indicator.




3.1.3.5.1 Cathode-ray tube display unit

This symbol represents a cathode-ray tube display unit.




3.1.3.6 Sound input-output unit

This symbol is a generic symbol representing any kind of sound input-output unit; for example, telephone set, audio recognition unit, audio response unit.




3.1.3.6.1 Telephone set

This symbol represents a telephone set.




3.1.3.6.2 Audio recognition unit

This symbol represents an audio recognition unit.



3.1.3.6.3 Audio response unit

This symbol represents an audio response unit.



3.2 Connection line

This symbol is the basic symbol representing any connection, including a communication link.



3.2.1 Connecting cable

This symbol is a generic symbol representing any type of connecting cable.




3.2.1.1 Ordinary connecting cable

This symbol represents an ordinary connecting cable.



3.2.1.2 Bus connection

These symbols represent any kind of bus connection.



The ends of the parallel lines shall be closed.

The symbol on the bottom signifies that the bus can be extended.

3.2.2 Communication link

This symbol is a generic symbol representing any kind of communication link.



3.2.2.1 Wired transmission

This is a generic symbol representing a wired communication link.




3.2.2.2 Wireless transmission

This is a generic symbol representing a wireless communication link.



3.2.2.2.1 Single-channel wireless transmission

This symbol represents a single-channel wireless communication link.




3.2.2.2.2 Multi-channel wireless transmission

This symbol represents a multi-channel wireless communication link.



Thus, a satellite can be represented by combining the processing unit symbol and the wireless transmission symbol as illustrated.



4 Conventions

4.1 Symbol shape


This International Standard does not give exact specifications for height and width ratios; the user shall not, however, vary these to such an extent that the symbol is not immediately recognizable.

Symbols may be drawn in any orientation, but the horizontal orientation should be preferred where possible. The mirror image of a shape implies the same function, but is not preferred.


4.2 Connection lines

4.2.1 Basic conventions for connection lines

- a) There is no preferred side for a connection line to enter or leave a symbol for a unit. Nor is any meaning implied in the direction a connection line takes. Also the position of units along a connection line does not imply any additional meaning unless otherwise clearly indicated. Multiple connection lines may be simplified to a single connection line.
- b) Arrows indicating the direction of flow may be used if necessary.
- c) An identifier or a description may be added to the connection line.
- d) The crossing and the junction of two or more connection lines are shown below. Crossing of lines means that they are not connected.




Crossing



Junction

The junction mark (●) may be omitted when the junction cannot be interpreted as a crossing.

Example:




Junction

4.2.2 Common connections

Common connections may be depicted by multiple junctions to a single line or by the use of the bus symbol. The bus symbol, if used, shall be closed at the ends.



Example:

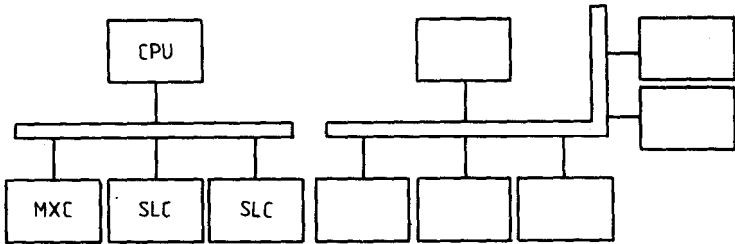


4.2.3 Representation of daisy-chained or star-burst connections

c) Star-burst connection may also be drawn as follows:

a) The following representation may be used for both daisy-chained and star-burst connections:

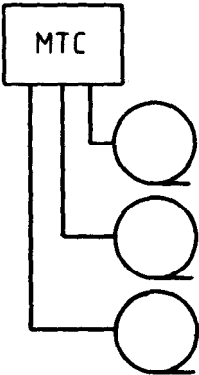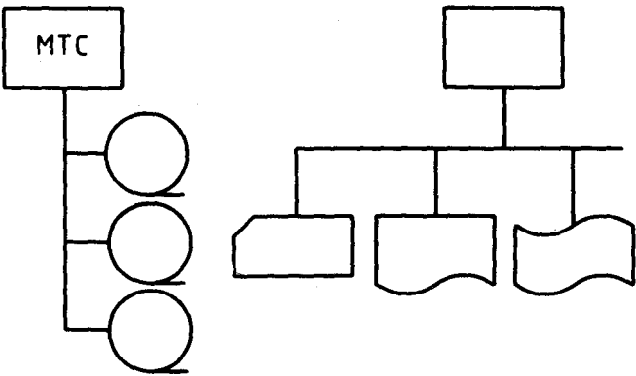


b) Daisy-chained connection may also be drawn as follows:

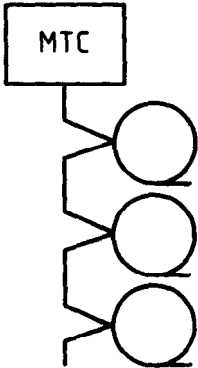


4.2.4 Representation of crosscall functions


a) When the crosscall function is contained in input-output units, the connection shall be drawn as follows:

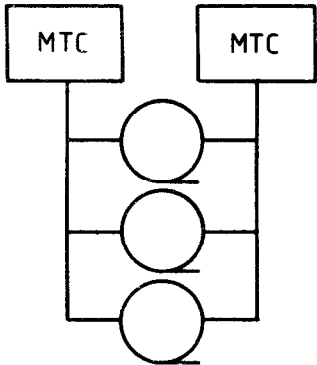

b) When the crosscall function is contained in control units, the connection shall be drawn as follows:

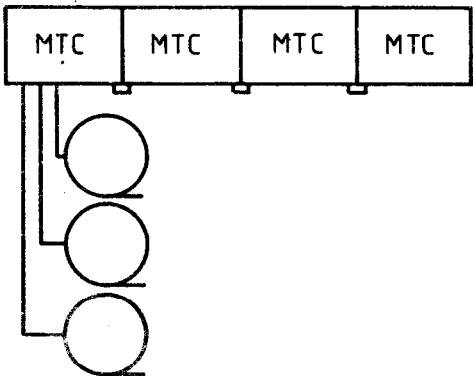

The above diagram may be simplified as shown in the following example. In this case, the crosscall function shall be clarified by the use of additional information.

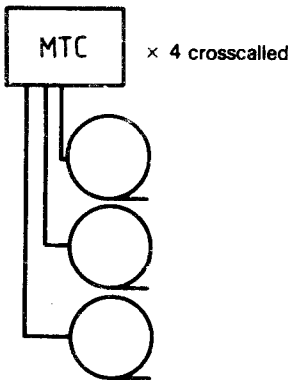

4.2.5 Representation of line continuation

When a connection line cannot be drawn directly between two units, the fact that the line is continued may be shown in the following way:



The same unique identifier shall be contained in the corresponding circles.


4.2.6 Representation of grouped connections

The fact that connections are physically grouped may be indicated as follows:



4.2.7 Omission of connection source or destination


The source or destination of a connection may be omitted but the fact that the connection exists should be made evident. For example:

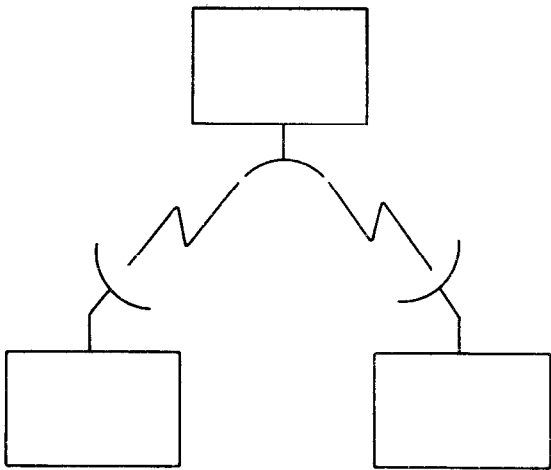

4.3 Identification of symbols


A symbol may be identified with a specific kind of unit or specific level of description by placing in or near the symbol the name, mnemonic, or model number for specific devices, or a generic name for higher levels of description (for example, node, major node, message switcher).

Examples:

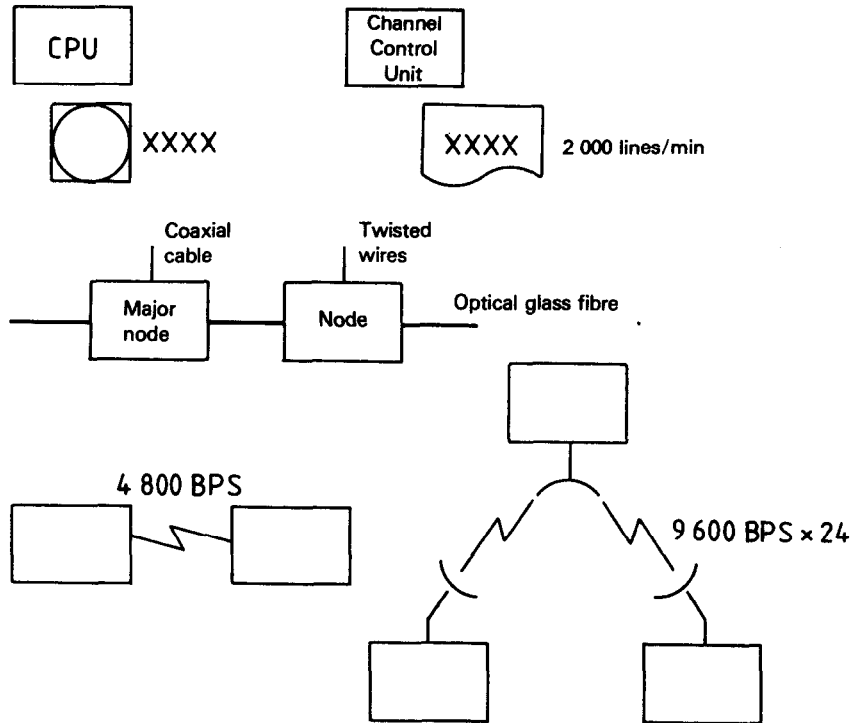


4.4 Representation of multiple units in a single enclosure

a) Multiple magnetic tape units may be drawn as follows:

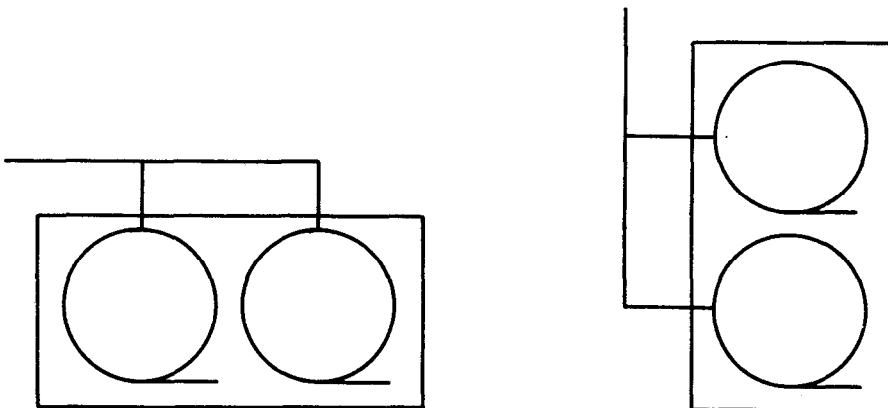

b) Multiple magnetic disk units may be drawn as follows:

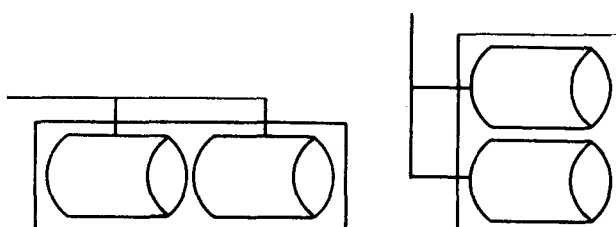


c) Multiple units, such as a central processor unit, storage unit, and channel units contained in a single enclosure, may be drawn as follows:

MSU		512 KB	
CPU			
B	M	S	S
M	X	L	L
C	C	C	C

4.5 Proper use of symbols


When an intelligent terminal or an input-output unit with multiple functions is to be represented as a single symbol, a symbol representing the principal input-output function shall be used.

Examples:

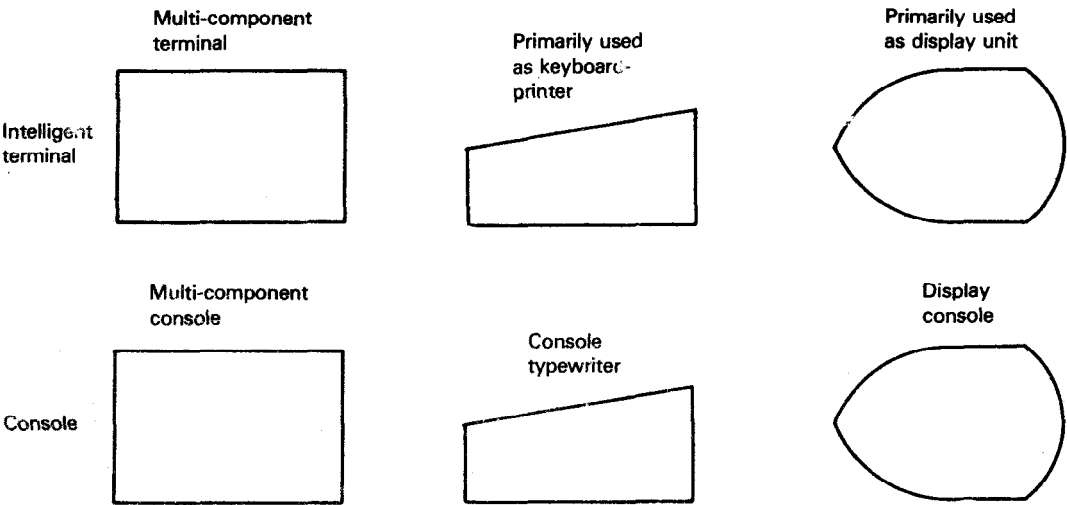

4.6 Representation of a selection unit


This symbol represents a selection unit which may take the form of a telephone exchange, message switching unit, device switch or a distributor.



4.7 Representation of future installations


Units for installation some time in the future shall be represented by dotted lines.

Example:

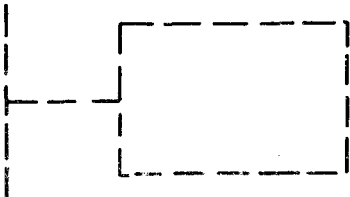


4.8 Repetitive representation of the same units

As an alternative to multiple, independent symbols, the same unit symbol may be shown in an overlay-pattern as shown below.

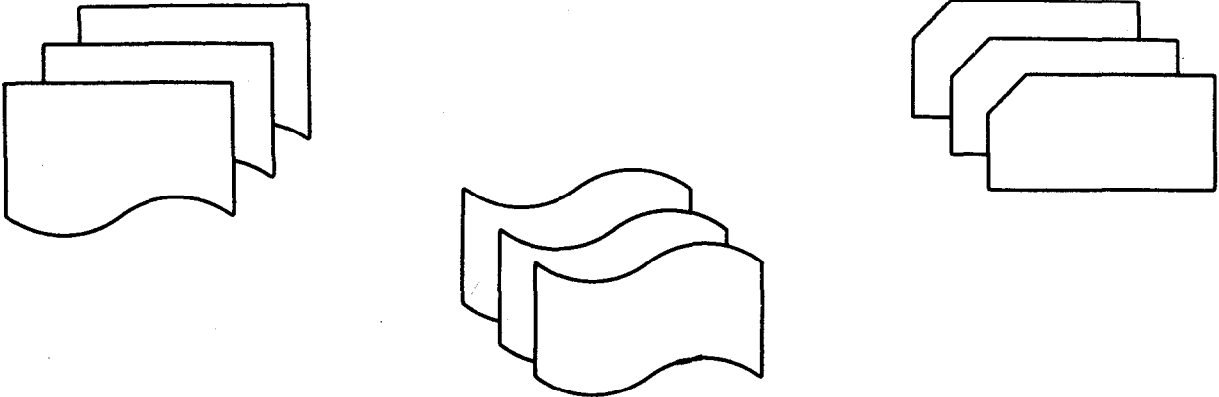


4.9 Overlaid representation of different units

If two different units are built or used together in such a way as to be a single unit for all practical purposes, they may be shown by an overlaid representation.












4.10 Representation of omission





Ellipses may be used to represent the omission of symbols when graphical representation of the exact number of units is not required.

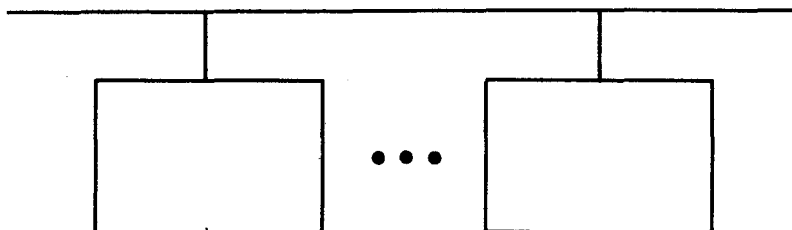

5 Consolidated table of symbols

Level 1	Level 2	Level 3	Level 4
Physical unit or its enclosure (see 3.1) 	Processing or control unit (see 3.1.1) 	Processing or control unit (see 3.1.1.1) 	
		Selection unit (see 3.1.1.2) 	
		Conversion unit (see 3.1.1.3) 	
	Storage unit (see 3.1.2) 	Main storage unit (see 3.1.2.1) 	(See text for alternative representation)
		Sequential access storage unit (see 3.1.2.2) 	Magnetic tape unit (see 3.1.2.2.1) 
			Cartridge or cassette unit (see 3.1.2.2.2) 
		Direct access storage unit (see 3.1.2.3) 	Magnetic disk or drum unit (see 3.1.2.3.1) 
			Flexible disk unit (see 3.1.2.3.2) 

Level 1	Level 2	Level 3	Level 4
Physical unit or its enclosure (continued) (see 3.1)	Storage unit (continued) (see 3.1.2)	Direct access storage unit (continued) (see 3.1.2.3)	Solid-state or magnetic core peripheral unit (see 3.1.2.3.3) 
		Mass storage unit (see 3.1.2.4)	Mass storage unit (see 3.1.2.4.1) 
			Tape-cartridge-based mass storage unit (see 3.1.2.4.2) 
	Input-output unit (see 3.1.3) 	Input-output unit for human-readable document (see 3.1.3.1) 	Printer (see 3.1.3.1.1) 
			X-Y plotter (see 3.1.3.1.2) 
		Manual input unit (see 3.1.3.2) 	Online keyboard (see 3.1.3.2.1) 
		Card unit (see 3.1.3.3) 	Punched card unit (see 3.1.3.3.1) 
		Punched tape unit (see 3.1.3.4) 	

Level 1	Level 2	Level 3	Level 4
Physical unit or its enclosure (continued) (see 3.1)	Input-output unit (continued) (see 3.1.3)	Display unit (see 3.1.3.5)	Cathode-ray tube display unit (see 3.1.3.5.1)
			
		Sound input-output unit (see 3.1.3.6)	Telephone set (see 3.1.3.6.1)
			
			Audio recognition unit (see 3.1.3.6.2)
			
			Audio response unit (see 3.1.3.6.3)
			
Connection line (see 3.2)	Connecting cable (see 3.2.1)	Ordinary connecting cable (see 3.2.1.1)	
			
	Communication link (see 3.2.2)	Bus connection (see 3.2.1.2)	
			
		Wired transmission (see 3.2.2.1)	
			
		Wireless transmission (see 3.2.2.2)	Single-channel wireless transmission (see 3.2.2.2.1)
			
			Multi-channel wireless transmission (see 3.2.2.2.2)
			

Standard Mark

The use of the Standard Mark is governed by the provisions of the *Bureau of Indian Standards Act, 1986* and the Rules and Regulations made thereunder. The Standard Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well defined system of inspection, testing and quality control which is devised and supervised by BIS and operated by the producer. Standard marked products are also continuously checked by BIS for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Revision of Indian Standards

Indian Standards are reviewed periodically and revised, when necessary and amendments, if any, are issued from time to time. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition. Comments on this Indian Standard may be sent to BIS giving the following reference:

Doc : No. LTD 33 (1543)

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones : 331 01 31, 331 13 75

Telegrams : Manaksanstha
(Common to all Offices)

Regional Offices :

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg
NEW DELHI 110002

Telephone

{ 331 01 31
{ 331 13 75

Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Maniktola
CALCUTTA 700054

{ 37 84 99, 37 85 61,
{ 37 86 26, 37 86 62

Northern : SCO 445-446, Sector 35-C, CHANDIGARH 160036

{ 53 38 43, 53 16 40,
{ 53 23 84

Southern : C. I. T. Campus, IV Cross Road, MADRAS 600113

{ 235 02 16, 235 04 42,
{ 235 15 19, 235 23 15

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)
BOMBAY 400093

{ 632 92 95, 632 78 58,
{ 632 78 91, 632 78 92

Branches : AHMADABAD, BANGALORE, BHOPAL, BHUBANESHWAR, COIMBATORE
FARIDABAD, GHAZIABAD, GUWAHATI, HYDERABAD, JAIPUR, KANPUR
LUCKNOW, PATNA, THIRUVANANTHAPURAM.